



60 Series New Generation

Premium Pocket Testers
(pH/ORP/Conductivity/TDS/Salintiy)





Durable design:
IP67 Waterproof
& Dustproof





Easy-to-install
Replaceable Probes



Powered by AAA batteries,
up to 2000 hours of
operation time

Display Features

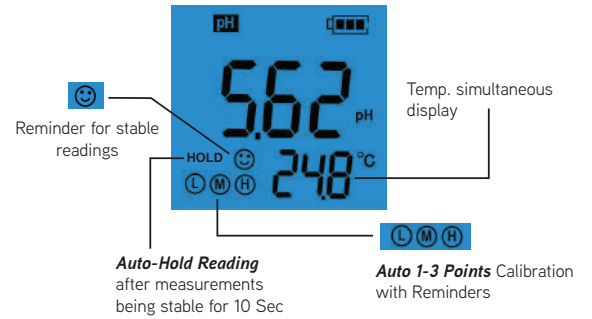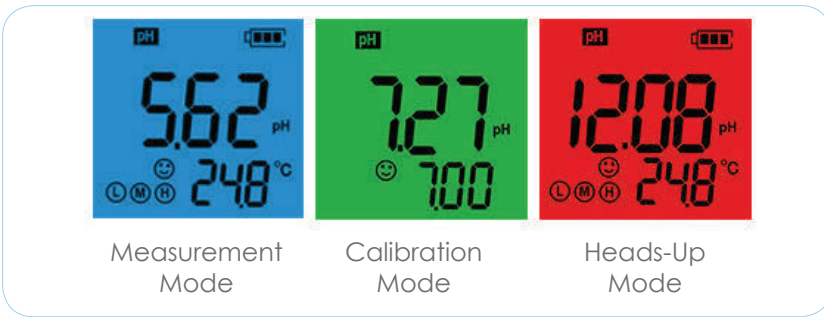

Probe Features

6 Models for your
choice



PH60 (Glass Bulb)	PH60F (Flat Glass)	PH60S (Spear Glass)	ORP60 (Platinum)	EC60 (Platinum Black)	PC60 (Glass Bulb & Platinum Black)
General water solution pH Test	Surface and micro-volume pH Test	Solid/Semi-Solid pH Test	ORP Test	Conductivity/TDS/ Salinity Test	pH/Cond./TDS/ Salinity Test

Probe Applications



Test anywhere



Micro-Volume
pH Test



Skin pH Test



Food pH Test

60 Series ■ Premium Pocket Testers



	PH60	PH60F	PH60S	
pH	Measuring Range	-2.00 to 16.00 pH		
	Resolution/Accuracy	0.01pH / ±0.01 pH		
	Calibration	1 to 3 points Auto Calibration		
ORP	Measuring Range	±1000 mV		
	Resolution/Accuracy	1 mV / ±0.2% F.S		
Temp.	Measuring Range	0 to 50.0 °C (32 to 122 °F)		
	Temp. Compensation	Automatic 0 to 50.0 °C (32 to 122 °F)		
Others	Heads-Up Function	Yes		
	Self-Diagnosis	Yes		
	Low-Battery Warning	Yes		
	IP Rating	IP67 Waterproof and Dustproof, Floatable		
	Power Supply	DC3V AAA batteries x4; Continuous working > 2000 hours		
	Sensor Model	PH60-E	PH60F-E	PH60S-E
	Application	General water solution's pH	Flat surface pH (fabrics, skin, paper) and micro-volume water solution's pH	Solid/Semi-Solid food samples (cheese, meat, fruit, sushi rice...) and soil's pH
Compatible Probes	PH60-E, PH60F-E, PH60S-E, ORP60-E			

PH60 COMPLETE TEST KIT





	PC60	EC60	ORP60	
pH	Measuring Range	-2.00 to 16.00 pH	/	
	Resolution/Accuracy	0.01 pH / ±0.01 pH	/	
	Calibration	1 to 3 Points Auto Calibration	/	
ORP	Measuring Range	/	±1000 mV	
	Resolution/Accuracy	/	1 mV / ±0.2% F.S	
Cond.	Measuring Range	0-200.0 μS/cm, 0-2000 μS/cm, 0-20.00 mS/cm	/	
	Resolution/Accuracy	0.1/1 μS, 0.01 mS / ±1% F.S	/	
	Calibration	1 to 3 Points Auto Calibration	1 to 3 Points Auto Calibration	1 Point Manual Calibration
	Temp. Coefficient Setting	0.00 to 4.00%/°C	0.00 to 4.00%/°C	/
TDS.	Measuring Range	0.0 ppm to 10.00 ppt	/	
	TDS. Factor Setting	0.4 to 1.0	/	
Salinity	Measuring Range	0 to 10.00 ppt	/	
Temp.	Measuring Range	0 to 50.0 °C (32 to 122°F)		
Others	Temp. Compensation	Yes		No
	Heads-Up Function	No	No	Yes
	Self-Diagnosis	Yes		
	Low-Battery Warning	Yes		
	IP Rating	IP67 Waterproof and Dustproof		
	Power Supply	DC3V AAA batteries x4; Continuous working > 1000 hours	DC3V AAA batteries x4; Continuous working > 1000 hours	DC3V AAA batteries x4; Continuous working > 2000 hours
	Sensor Model	PC60-E	EC60-E	ORP60-E
Compatible Probes	PH60-E, PH60F-E, PH60S-E, PC60-E, EC60-E	EC60-E	ORP60-E	